

DOT Downlights

INSTALLATION INSTRUCTIONS

DOT 9700SM Series Surface Mounted Downlights

Model Numbers –	DOT 9734SMC	DOT 9754SMC	DOT 9774SMC	DOT 9794SMC
	DOT 9734SMP	DOT 9754SMP	DOT 9774SMP	DOT 9794SMP
	DOT 9738SMC	DOT 9758SMC	DOT 9778SMC	DOT 9798SMC
	DOT 9738SMP	DOT 9758SMP	DOT 9778SMP	DOT 9798SMP




IP 20




Complies with IEC60598
Complies with AS/NZS60598
RoHS compliant


– Supply voltage 220-240V 50 HZ – Suitable for indoor use only – Min. distance from building element = 0.1M

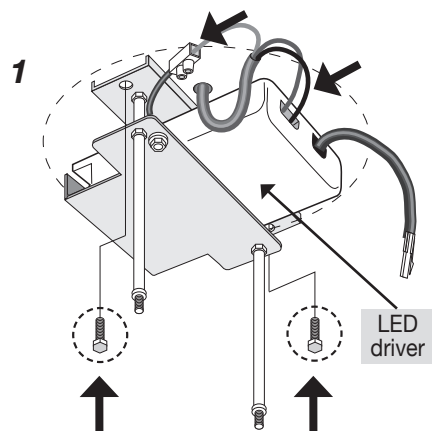


- Fix bracket assembly to mounting surface
- Connect mains cable to driver and connect earth

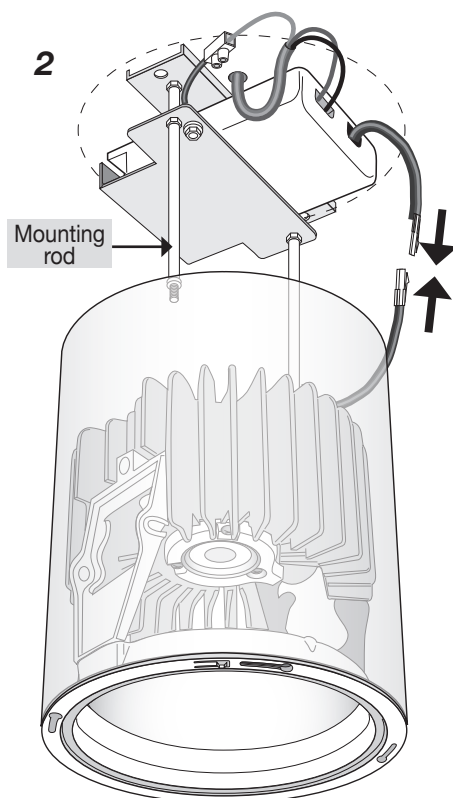


- Connect downlight cable to driver secondary cable
- Insert mounting rods between heat sink fins closest to downlight legs

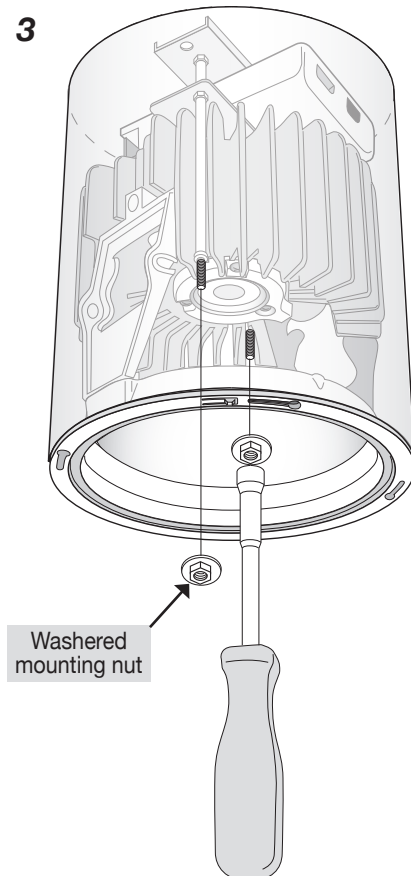

- Secure luminaire with washed mounting nuts (tool supplied).
Caution – do not over tighten

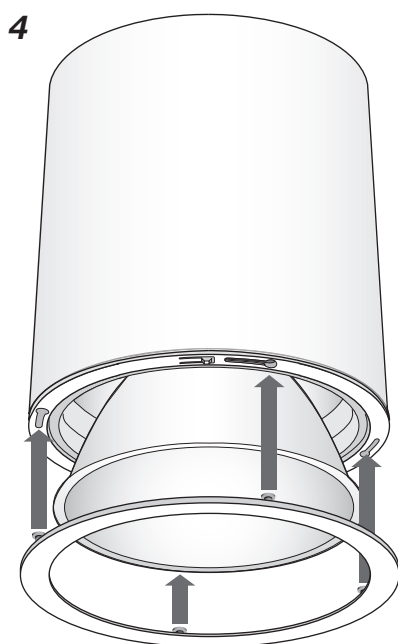

- Replace reflector
- Replace AXLock Ceiling Plate / Accessory

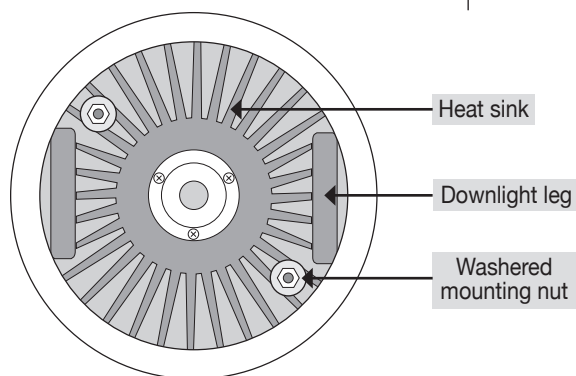


AXLock Accessories – Installation

A931-DL



Round – Soft
Diffusion Lens
IP54

A933



Round
Washlight Lens
IP54

A937-FG



Round
Flush Glass
IP54

A937-DG



Round
Dropped Glass
IP20

